

REEL 258/322

19 Reels and reel containers



Single-use

Winding material : Enamelled copper wire

Material : PS, ABS

Standard winding volume : 6728 cm³

Central bore Ø : 100 mm

Catalogue categorization: 19

TECHNICAL DATA - SPOOLS

Spools

Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding-volume	Central bore Ø tapered part	Drive-hole/pin	Drive-distance
d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm ³]	d4 [mm]	d5 [mm]	E1 [mm]
258	160	30.5 - 100	322	280	21	6728			

Container

Designation	Outer Ø	Overall height	Inner Ø bottom	Inner Ø top	
	d1 max	h1 max	d2	d3	h2 min
Container VB 250/400	315	500	270	280	50

PACKAGING


Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm
Reel 258/322	10	12	68x44x71	120	124	100x126x207
Container VB 250/400	0	0		64	169	112x120x206

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

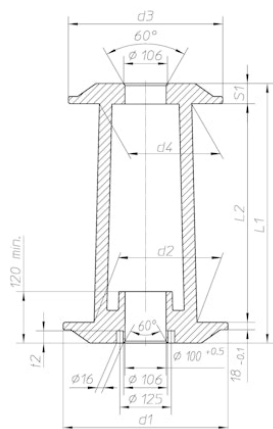

Container

